

E1000


OPENING WINDOW & DOOR SYSTEM

An opening window and door system, capable to support a large variety of solutions. It offers a wide profile range for inward and outward opening windows and doors. Integration with shutter or rolling shutter is available.



TECHNICAL FEATURES

Frame width:	40mm
Min. frame height:	54mm
Min. casement height (f+v):	94mm
Glazing infill range (frame):	6 ÷ 20mm
Glazing infill range (vent):	6 ÷ 28mm

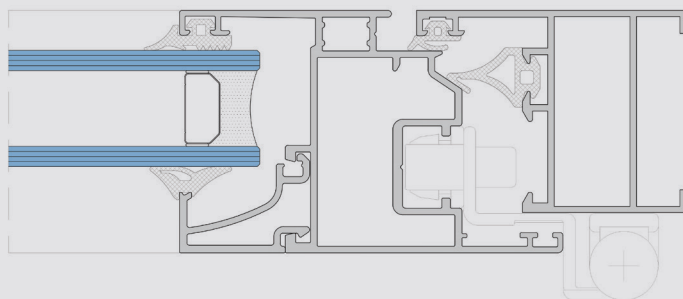

PERFORMANCE*

Air permeability:	up to Class 4
Watertightness:	up to Class 9A
Resistance to wind load:	up to Class C4
Acoustic performance:	up to 38 dB



TYOLOGIES

- Turn, tilt & turn, tilt, projecting, folding, fixed, parallel sliding, door-height window
- Single & double leaf
- Inward & outward opening



HARDWARE

EURO-groove & PVC-groove
Max. vent weight: 100kg

SURFACE TREATMENT

QUALICOAT - Powder coating
QUALANOD - Anodising
QUALIDECO - Wood effects