

E75


OPENING SYSTEM



A heavy duty opening window system with thermal break, designed to support a large variety of solutions. It provides a wide range of profile options for inward & outward opening windows. Special hidden vent and ventilation vent solutions are available. It can be integrated with shutter and rolling shutter.

TECHNICAL FEATURES

Frame width:	75mm
Min. frame height:	59mm
Min. casement height (f+v):	78mm / 106mm
Glazing infill range (frame):	14 ÷ 55mm
Glazing infill range (vent):	24 ÷ 64mm

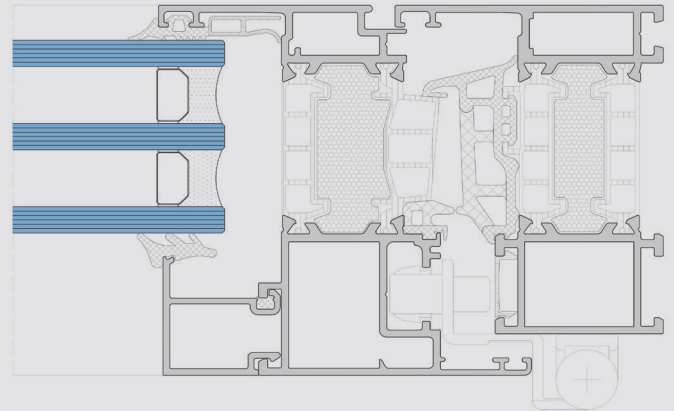


PERFORMANCE*

Air permeability:	up to Class 4
Watertightness:	up to Class E1500
Resistance to wind load:	up to Class C5
Thermal transmittance (U_f):	from 1,2 W/(m²K)
Acoustic performance:	up to 46 dB
Burglar resistance:	up to Class RC2
Fire resistance:	up to Class EI 60
Impact resistance:	up to Class 3



TYOLOGIES

- Turn, tilt & turn, tilt, projecting, folding, fixed, parallel sliding, hidden vent
- Single & double leaf
- Inward & outward opening

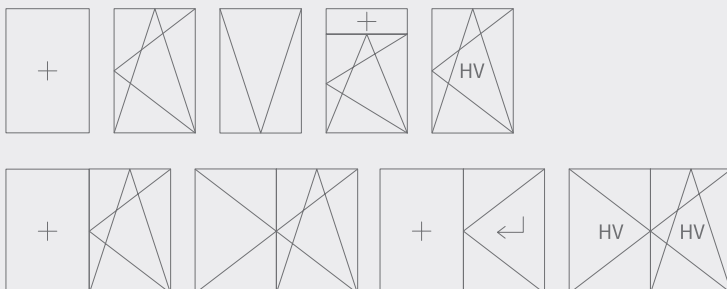

HARDWARE

Eurogroove & PVC groove
Concealed hinges
Max. vent weight: 170kg

SURFACE TREATMENT

QUALICOAT - Powder coating
QUALANOD - Anodising
QUALIDECO - Wood effects