

EW70


OPENING SYSTEM

A new generation opening window system with thermal break. It provides solutions to several configurations thanks to its wide profile range. It ensures material optimal solutions with exceptionally high testing performances. A special hidden vent solution is supported, as well as integration with shutter or rolling shutter.



TECHNICAL FEATURES

Frame width:	70mm
Min. frame height:	47mm
Min. casement height (f+v):	74mm / 95mm
Glazing infill range (frame):	17 ÷ 50mm
Glazing infill range (vent):	19 ÷ 52mm

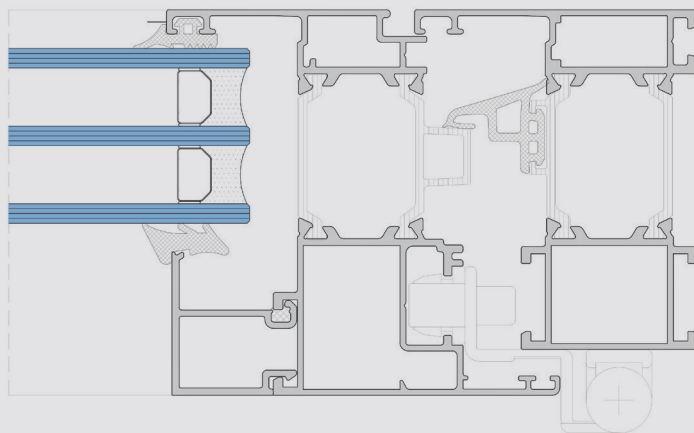


PERFORMANCE*

Air permeability:	up to Class 4
Watertightness:	up to Class E750
Resistance to wind load:	up to Class C4
Thermal transmittance (U_f):	from 1,2 W/(m²K)
Impact resistance:	up to Class 4
Mechanical properties:	Class 2



TYOLOGIES

- Turn, tilt & turn, tilt, fixed, door height window, hidden vent
- Single & double leaf
- Inward opening

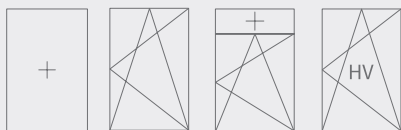

HARDWARE

Eurogroove & PVC groove
Max. vent weight: 130kg

SURFACE TREATMENT

QUALICOAT - Powder coating
QUALANOD - Anodising
QUALIDECO - Wood effects